



TECHNICAL SPECIFICATIONS MODEL: B4T16-125SC 160S, 4 TINE, 1 1/4 YD³, GRAPPLE, BN24359

1 1/4 YD ³ 4 TINE 160 SERIES	GRAPPLE	
Open	9 9 "	2514.6mm
Capacity	1.25 yd³	0.95 m³
Cylinder Bore	3 "	76mm
Cylinder Max. Pressure	5000 psi	345 bar
Rotator Max. Pressure	2540 psi	175 bar
Flow (Rotate Circuit)	10 gpm	38 Lpm
Grapple Rotation, At 10 gpm	29 rpm	
Flow (Open/Close Circuit)	50 gpm	189 Lpm
Cycle Time Theoritical (Open/Close Circuit)	1.5 sec/2 sec	
Weight (with rotator)	3490 lb	1583 kg

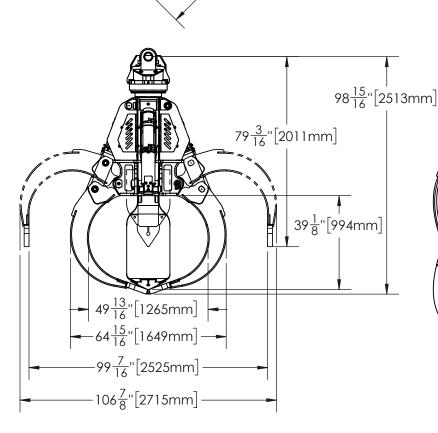

83<u>1</u>"[2114mm]

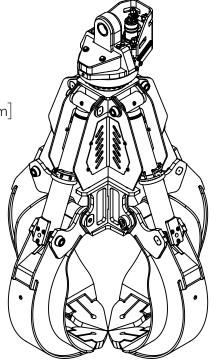

5 Winstar Road Oro-Medonte, ON L0L 2L0, Canada info@batemanmanufacturing.com batemanmanufacturing.com 705-487-5020



2023-10-27

WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS AND TO IMPROVE OUR PRODUCTS WITHOUT NOTICE OR OBLIGATION ALL SCRAP AND MATERIAL HANDLING GRAPPLES DESIGNED IN ACCORDANCE WITH ASME BTH-1 DESIGN AND STRENGTH REQUIREMENTS