



TECHNICAL SPECIFICATIONS MODEL: BPG200-43WR-072-MR200S 200 SERIES 4/3 WOODRAKE GRAPPLE, BN23764

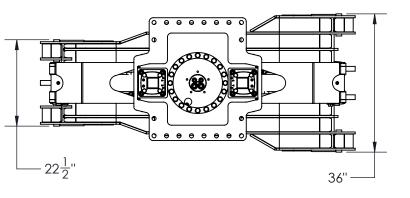


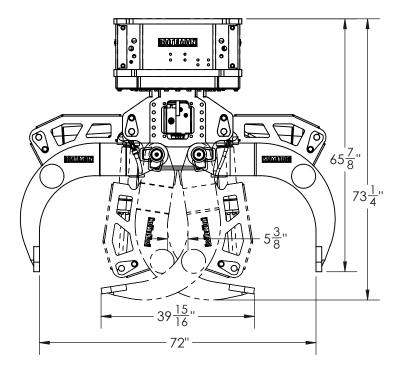

200 SERIES 4/3 WOODRAKE GRAPPLE

Open	72"	1829 mm
Area tip to tip	5.0 ft ²	0.46 m²
Cylinder Bore	3 1/2"	89 mm
Lock valve on Cylinder	Included	
Cylinder Max. Pressure	5000 psi	345 bar
Weight (grapple only)	2260 lb	1025 kg

200S SERIES MANIPULATING ROTATOR Rotation Unlimited 112,000 lb 50802 kg Lifting capacity Max pressure 3000 psi 207 bar 87500 lb-in 9886.2 Nm Max torque **Rotator flow** 13 gpm 49 L/min **Rotation speed** 15 rpm 399 kg Weight 880 lb



555S GRAPPLE SAW OPTION		
Motor size	0.61/1.16 in³	10/19 cc
Required pressure	3500 psi	241 bar
Required flow	30/42 gpm	114/159 Lpm
Saw bar length	35/39 in	889/991 mm
Weight	375 lb	170 kg

650S GRAPPLE SAW OPTION Motor size 2.44 in³ 40 cc **Required pressure** 3100 psi 214 bar 208 Lpm **Required flow** 55 gpm 39/45 in 991/1143 mm Saw bar length 584 lb 265 kg Weight

BATEMAN MANUFACTURING 5 WINSTAR ROAD ORO-MEDONTE, ONTARIO LOL 2LO, CANADA

WWW.BATEMANMANUFACTURING.COM MAIL@BATEMANMANUFACTURING.COM PHONE: (705) 487-5020 FAX: (705) 487-5290



WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS AND TO IMPROVE OUR PRODUCTS WITHOUT NOTICE OR OBLIGATION ALL SCRAP AND MATERIAL HANDLING GRAPPLES DESIGNED IN ACCORDANCE WITH ASME BTH-1 DESIGN AND STRENGTH REQUIREMENTS 2021-12-23