


**BATEMAN**

GRYB

MATERIAL HANDLING

# ORANGE PEEL GRAPPLE


**FIVE-TINE - 160 & 210 SERIES**

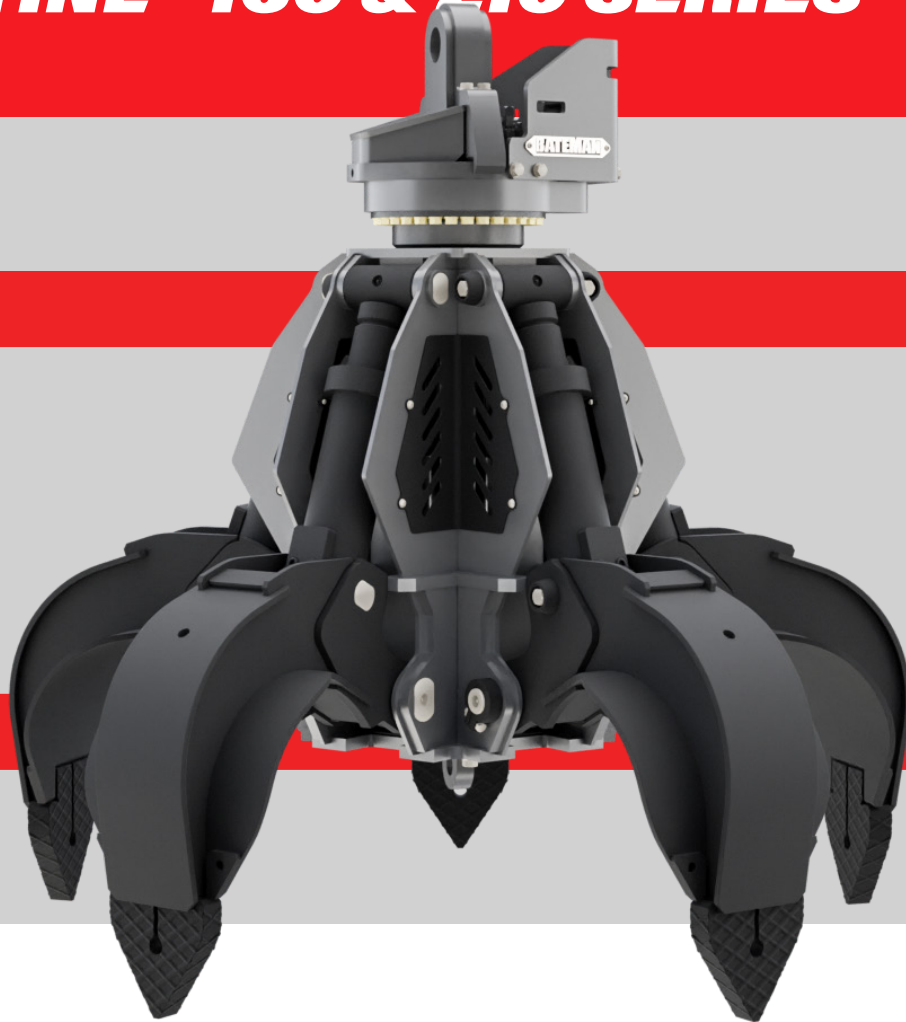

Work with increased confidence with BATEMAN's all-new, award-winning 160 & 210 series available in four-tine, five-tine, and magnet grapple configurations. Our new grapples are built to be the toughest in the industry with the ferrous metal sorting capabilities of a magnet. With improved designs for greater impact protection, longer life, and optimized work time, our grapples have been reengineered to take power and precision further than ever.

**DESIGNED  
FOR A  
BRAND-NEW,  
BOLDER  
EXPERIENCE.**

# ORANGE PEEL GRAPPLE FIVE-TINE - 160 & 210 SERIES

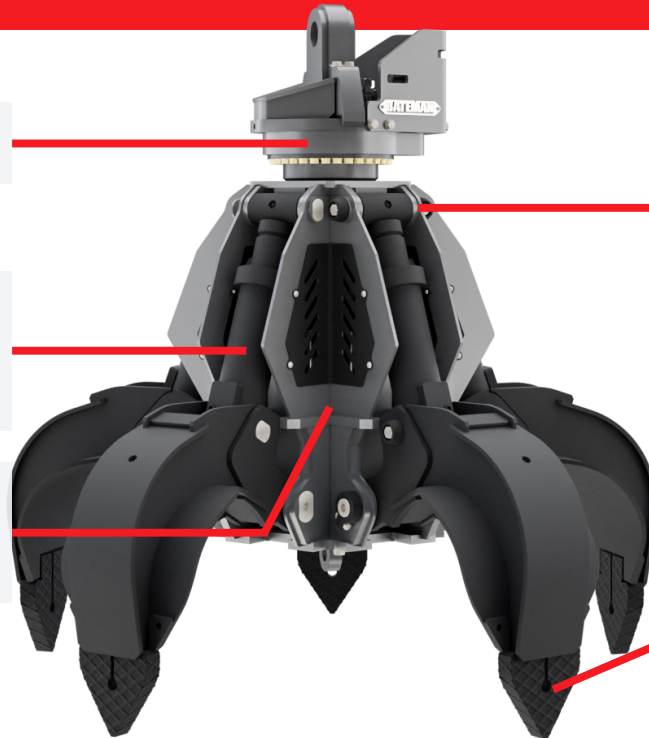

**Improved rotator guarding** for greater impact protection.

**Newly designed double wall cylinders** include return oil channel, eliminating exposed hoses and risk of damage. Now with fully enclosed cylinder guards, zero chrome exposure.

**More robust body** for durability and greater cylinder protection as well as a thicker frame design for better pin support and hose guarding.

**Larger pin diameter** and improved bushing design with seals for longer life and optimized work time.

**Improved tine design** for optimal scrap penetration and material collection. Thicker, superior design with hardfacing on the tip area for durability.

## 160 SERIES FIVE-TINE ORANGE PEEL SCRAP GRAPPLE

MODEL	CAPACITY YD <sup>3</sup> /M <sup>3</sup>	WEIGHT LBS (KG)	TIP-TO-TIP WIDTH (OPEN TINES) IN (MM)	HEIGHT (OPEN TINES) IN (MM)	HEIGHT (CLOSED TINES) IN (MM)
B5T16-050SC	0.5 / 0.40	3,680 (1,669)	71 (1,810)	74 (1,881)	84 (2,132)
B5T16-075SC	0.75 / 0.55	3,810 (1,728)	80 (2,040)	76 (1,923)	89 (2,255)
B5T16-100SC	1 / 0.75	4,010 (1,819)	90 (2,308)	78 (1,972)	94 (2,398)
B5T16-125SC	1.25 / 0.95	4,210 (1,910)	100 (2,526)	79 (2,011)	99 (2,514)
B5T16-150SC	1.5 / 1.15	4,420 (2,005)	106 (2,704)	80 (2,043)	103 (2,609)

## 210 SERIES FIVE-TINE ORANGE PEEL SCRAP GRAPPLE

MODEL	CAPACITY YD <sup>3</sup> /M <sup>3</sup>	WEIGHT LBS (KG)	TIP-TO-TIP WIDTH (OPEN TINES) IN (MM)	HEIGHT (OPEN TINES) IN (MM)	HEIGHT (CLOSED TINES) IN (MM)
B5T210-125SC	1.25 (1)	5,775 (2,619)	101 (2,558)	87 (2,204)	107 (2,705)
B5T210-150SC	1.5 (1.15)	5,840 (2,649)	104 (2,638)	87 (2,204)	109 (2,763)
B5T210-200SC	2 (1.5)	6,290 (2,853)	118 (2,996)	89 (2,258)	116 (2,947)
B5T210-250SC	2.5 (1.9)	6,615 (3,001)	132 (3,342)	91 (2,300)	123 (3,125)
B5T210-300SC	3 (2.3)	6,845 (3,105)	139 (3,538)	92 (2,335)	127 (3,227)