BATEMAN

A GRYB COMPANY

RECYCLING & WASTE ATTACHMENTS

TABLE OF CONTENTS

BATEMAN
A GRYB COMPANY

04 FOUR-TINE ORANGE PEEL GRAPPLES

06 FIVE-TINE ORANGE PEEL GRAPPLES

08 MAGNET GRAPPLES

10 SHIPS GEAR GRAPPLES

12 SORTING GRAPPLES

14 DEMOLITION CONTRACTOR GRAPPLES

16 DEMOLITION MAGNET GRAPPLES

18 WRECKER FORKS

20 PRECISION AUTO DISMANTLERS

22 DIESEL GENERATORS

24 HYDRAULIC GENERATORS

26 SPECIFICATIONS

How We Started

Established in 1989 in Barrie, Ontario, BATEMAN moved to Orillia, Ontario in 2002 due to an increase in demand & product.

In 2011, BATEMAN once again moved to a 35,000 sq. ft. facility in Oro-Medonte, Ontario in response to another increase in demand. In 2019, BATEMAN was purchased by GRYB, a material handling attachments manufacturer based in Victoriaville, Quebec.

Today, BATEMAN is proud to be a leading supplier of products both domestically and internationally.

FOUR-TINE ORANGE PEEL GRAPPLES

BATEMAN Orange Peel Grapples are designed to provide the highest production rate and the maximum durability. With our wide-body design, over-sized bearing rotators, high strength steel alloy bodies, high abrasion resistant tines, and internal hydraulic relief valves for jaw and cylinder protection, BATEMAN grapples have been proven to outlast the competition.

WORK WITH CONFIDENCE.

WIDE, T1 STEEL BODY
FOR DURABILITY

SEVERE-DUTY TIPS
MADE FROM AR500 STEEL

FULLY-GUARDED CYLINDERS
5,000 PSI

FIVE-TINE ORANGE PEEL GRAPPLES

BATEMAN Orange Peel Grapples are designed to provide the highest production rate and the maximum durability. With our wide-body design, over-sized bearing rotators, high strength steel alloy bodies, high abrasion resistant tines, and internal hydraulic relief valves for jaw and cylinder protection, BATEMAN grapples have been proven to outlast the competition.

UNLIMITED POSSIBILITIES.

WIDE, T1 STEEL BODY
FOR DURABILITY

SEVERE-DUTY TIPS
MADE FROM AR500 STEEL

FULLY-GUARDED CYLINDERS
5,000 PSI

MAGNET GRAPPLES

BATEMAN Magnet Grapples (Mag-Grabs) are purpose built to provide 100% handling efficiency for incoming and outgoing material, with the ferrous metal sorting capabilities of a magnet. The main body and tines are designed with great strength to survive tamping and packing loads and to withstand the extra load of the integrated magnet.

SUPERIOR QUALITY.

WIDE, T1 STEEL BODY FOR DURABILITY

HEAVY-DUTY LIFT MAGNET

SEVERE-DUTY TIPS MADE FROM AR500 STEEL

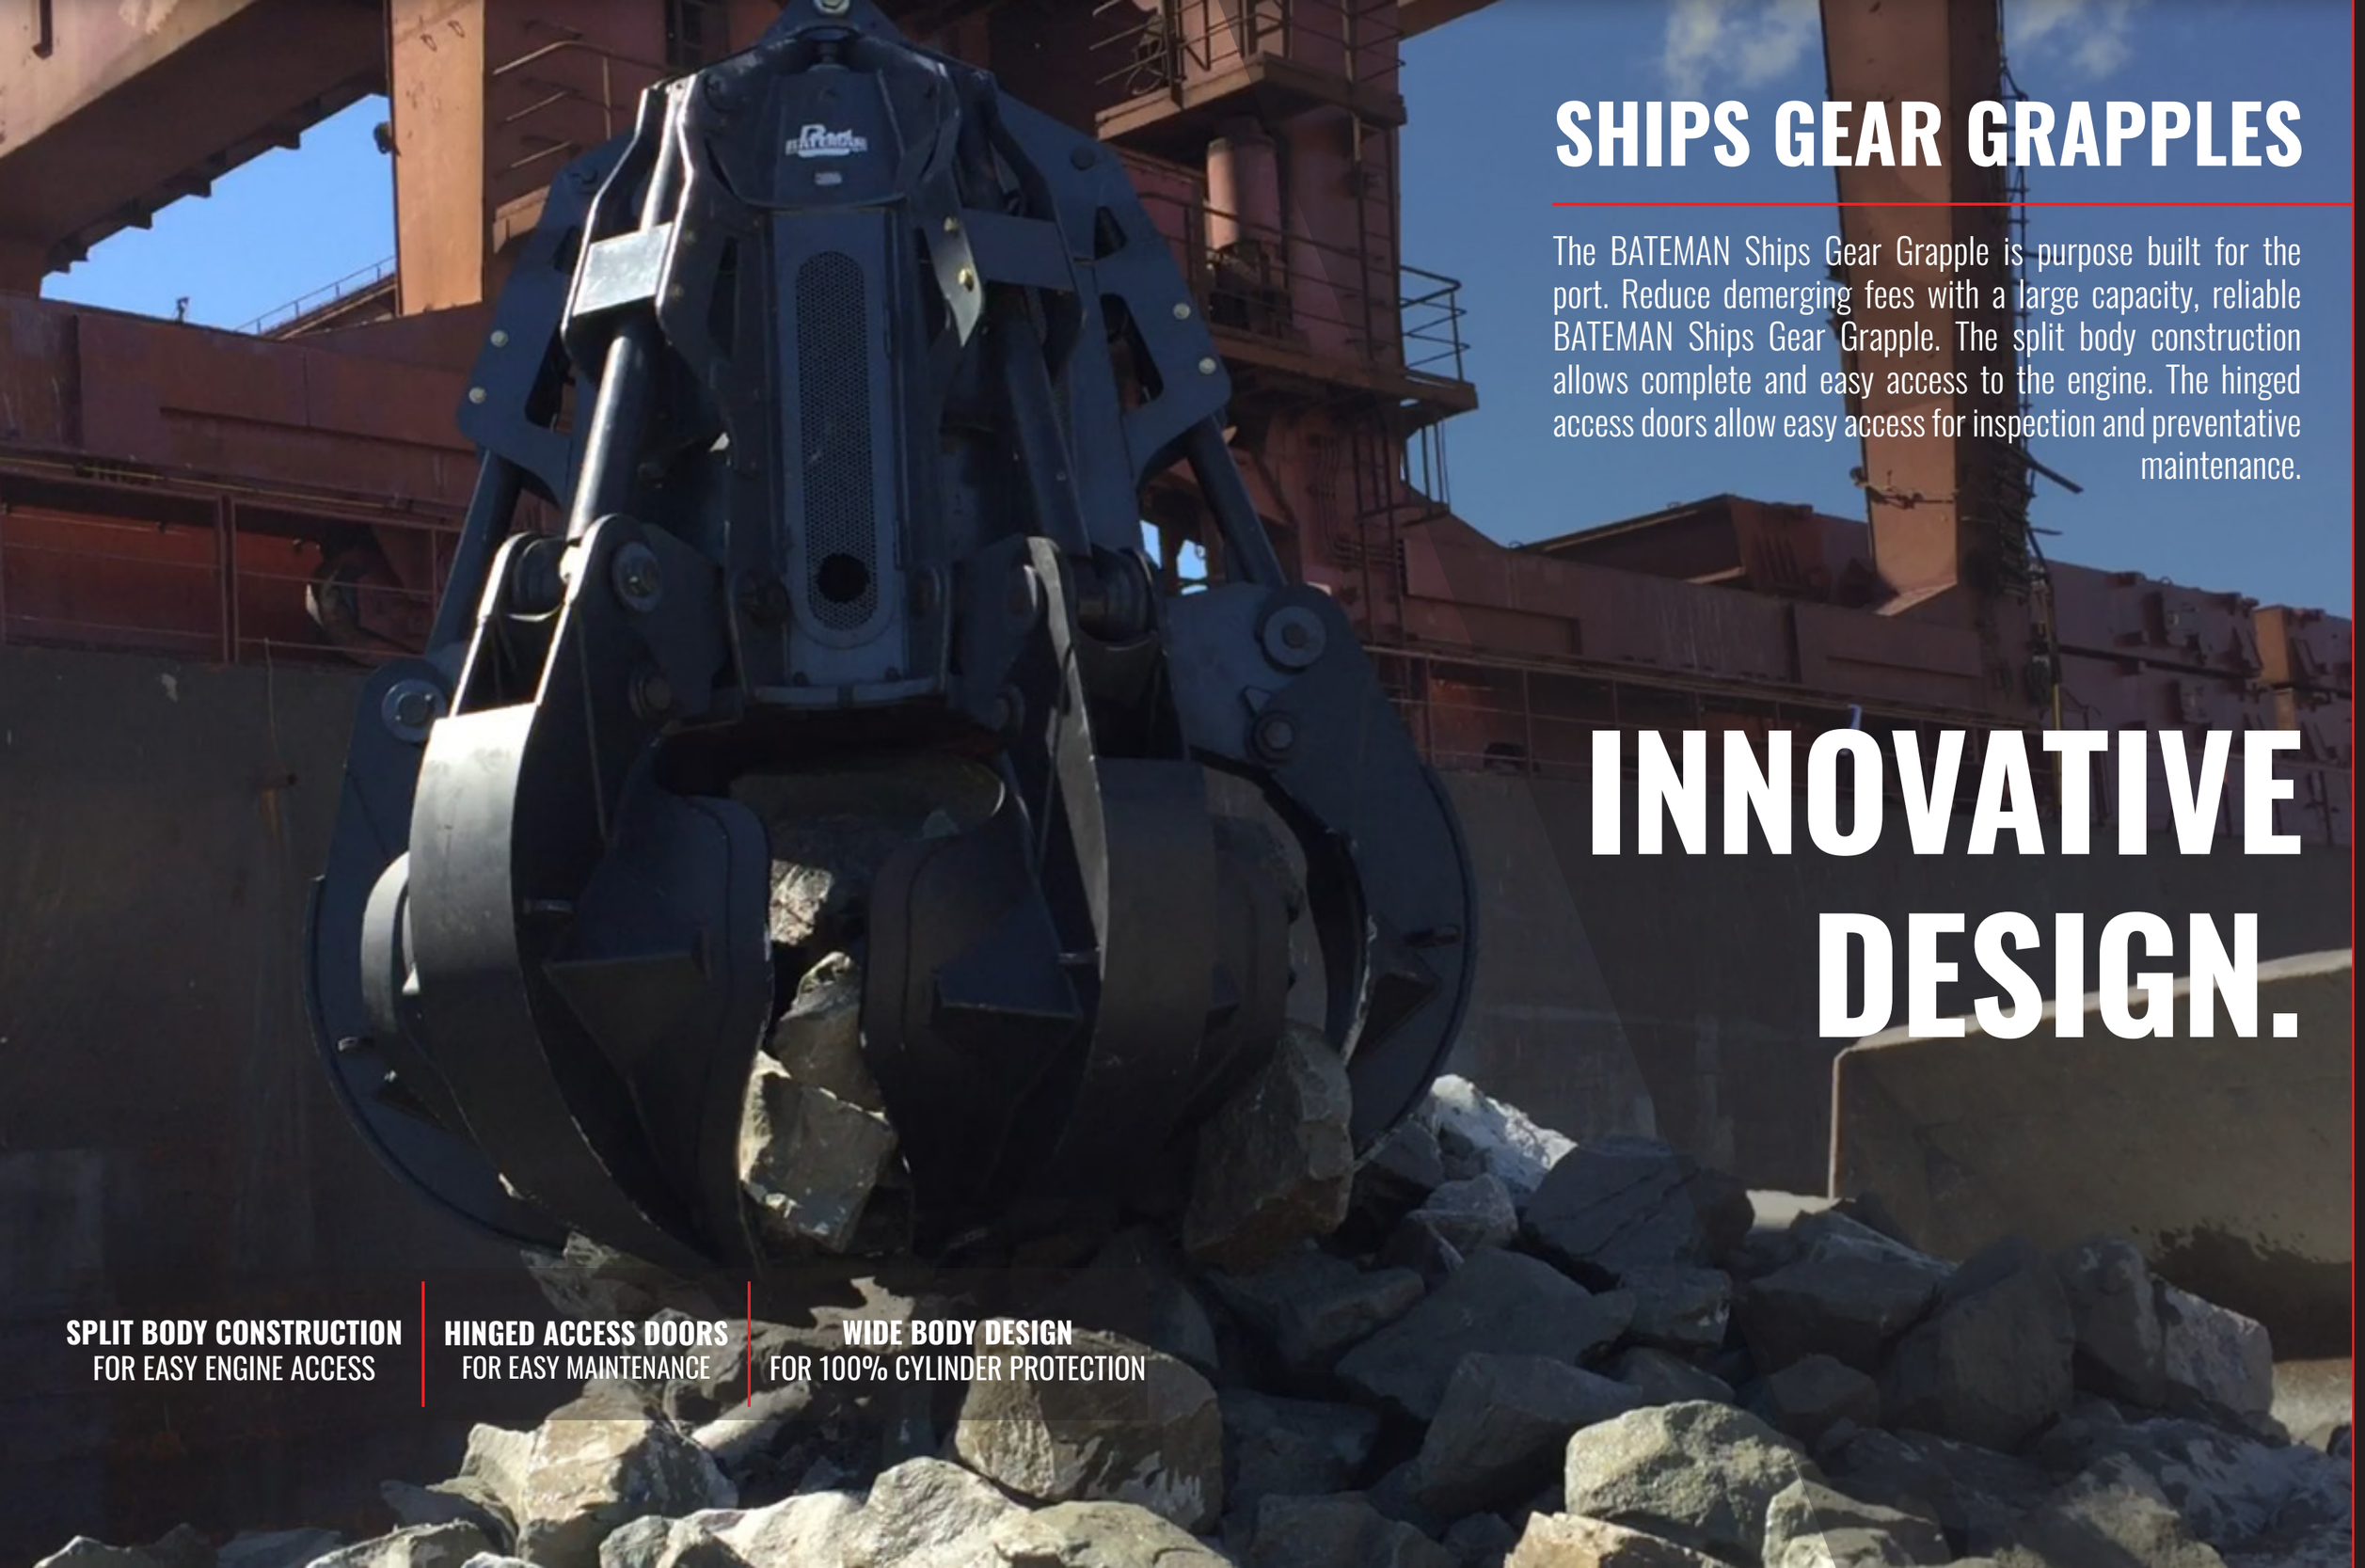

SHIPS GEAR GRAPPLES

The BATEMAN Ships Gear Grapple is purpose built for the port. Reduce demerging fees with a large capacity, reliable BATEMAN Ships Gear Grapple. The split body construction allows complete and easy access to the engine. The hinged access doors allow easy access for inspection and preventative maintenance.

INNOVATIVE DESIGN.

SPLIT BODY CONSTRUCTION
FOR EASY ENGINE ACCESS

HINGED ACCESS DOORS
FOR EASY MAINTENANCE

WIDE BODY DESIGN
FOR 100% CYLINDER PROTECTION

SORTING GRAPPLES

Available in either waste or demolition configurations, BATEMAN Sorting Grapples can be used for demolishing, sorting, and loading. Our rotating Sorting Grapples come complete with heavy-duty, fully protected cylinders and hoses, a robust design, and optional bolt-on sides that turn these grabbers into a clamshell bucket. BATEMAN Sorting Grapples are suitable for handling demolition, construction, and waste materials.

NEXT-LEVEL DURABILITY.

WASTE OR DEMOLITION
JAW AVAILABLE

CUSTOM SIZES
AVAILABLE UPON REQUEST

OVERSIZED PINS
WITH CUSTOM LOCKNUTS

DEMOLITION CONTRACTOR GRAPPLES

The BATEMAN Demolition Contractor is a reliable grapple for the demolition industry. Our in-house design team allows us to customize the BATEMAN Demolition Contractor to suit your application needs. Lugging is available for all material handler and excavator classes. The Demolition Contractor is available in a 2 over 3 tine standard configuration, or optional 3 over 4, or 4 over 5 tine configurations.

INCREASED DEXTERITY.

REINFORCED BOX TINE DESIGN
FOR MAXIMUM STRENGTH

2/3, 3/4, OR 4/5
TINE CONFIGURATIONS

HEAVY-DUTY
AR400 SHELL

DEMOLITION MAGNET GRAPPLES

The BATEMAN DEMO-MAG (Demolition Magnet Grapple) is one of BATEMAN's innovative ALL-IN-ONE attachments. This attachment combines the versatility of our Demolition Grapple with a durable magnet, giving it the ability to maneuver material and separate valuable ferrous steel without changing out attachments. The BATEMAN Demo-Mag is guaranteed to reduce your labour costs for separating and increase your return on ferrous metal.

STREAMLINED OPERATION.

INNOVATIVE
ALL-IN-ONE ATTACHMENT

HEAVY-DUTY MAGNET
FOR FERROUS LIFTING MATERIALS

HEAVY-DUTY AR500 TIPS
WITH HIGH TENSILE STRENGTH

WRECKER FORKS

BATEMAN designs and manufactures a wide variety of fork racks suitable for an assortment of industries.

ACHIEVE RESULTS.

UP TO 17,600 LBS CAPACITY
AT LOAD CENTRE

HEAVY-DUTY STEEL
CONSTRUCTION

VERSATILE
AND DYNAMIC

PRECISION AUTO DISMANTLERS

The BATEMAN Precision Auto Dismantler is built to withstand the toughest of recycling applications in order to minimize downtime and increase efficiency.

CRUSH IT.

IMMENSE JAW POWER
AND PRECISION

MAXIMIZE VALUE
OF END-OF-LIFE VEHICLES

HEAVY-DUTY TIPS
WITH HIGH TENSILE STRENGTH

DIESEL GENERATORS

BATEMAN continues to offer the scrap industry the best performing, most reliable generator on the market. All BATEMAN Diesel Generator Kits are supplied with all cables and controls. Match up our dependable generators with a BATEMAN Mag-Grab, Demo-Mag, Bucket Mag, or Scrap Mag.

POWER ON.

MOST RELIABLE
ON THE MARKET

CABLES & CONTROLS
INCLUDED

PERFECT MATCH
FOR MAGNETIZED ATTACHMENTS

HYDRAULIC GENERATORS

BATEMAN Hydraulic Drive Generator Kits are purpose built, machine specific, to allow for fast installation for excavator conversions, or other material handling scrap applications. Generator output ratings of 9, 15, 20, and 30 kW make these units an ideal match for the BATEMAN line of Mag-Grabs, Waste Mags, Demo Mags, or Mag Buckets.

CHANGING THE GAME.

PURPOSE BUILT
FOR YOUR MACHINE

FAST INSTALLATION
AND EXCAVATOR CONVERSIONS

PERFECT MATCH
FOR MAGNETIZED ATTACHMENTS

FOUR-TINE ORANGE PEEL GRAPPLES

	Series	Volume yd³/m³	Weight lb (kg)	Width in (mm)	Tip-To-Tip Width (Open Tines) in (mm)	Height (Open Tines) in (mm)	Height (Closed Tines) in (mm)
B4T15-050	150	0.5 / 0.38	2,800 (1,270)	81 (2,057)	72 (1,829)	71 (1,803)	85 (2,159)
B4T15-075	150	0.75 / 0.57	2,850 (1,293)	89 (2,261)	80 (2,032)	72 (1,829)	90 (2,286)
B4T15-100	150	1 / 0.76	3,000 (1,361)	96 (2,438)	87 (2,210)	73 (1,854)	93 (2,362)
B4T15-125	150	1.3 / 1	3,100 (1,406)	103 (2,616)	94 (2,388)	73 (1,854)	96 (2,438)
B4T15-150	150	1.5 / 1.15	3,250 (1,474)	109 (2,769)	95 (2,413)	79 (2,007)	100 (2,540)
B4T2-125	200	1.3 / 1	5,000 (2,268)	108 (2,743)	92 (2,337)	89 (2,261)	111 (2,819)
B4T2-150	200	1.5 / 1.15	5,250 (2,381)	115 (2,921)	101 (2,565)	89 (2,261)	112 (2,845)
B4T2-200	200	2 / 1.5	5,600 (2,540)	130 (3,302)	115 (2,921)	93 (2,362)	121 (3,073)
B4T2-300	200	3 / 2.29	5,700 (2,585)	141 (3,581)	126 (3,200)	94 (2,388)	127 (3,226)
B4T3-200	300	2 / 1.5	8,200 (3,719)	131 (3,327)	113 (2,870)	108 (2,743)	129 (3,277)
B4T3-300	300	3 / 2.29	8,750 (3,969)	145 (3,683)	126 (3,200)	110 (2,794)	136 (3,454)
B4T3-400	300	4 / 3.1	9,500 (4,309)	155 (3,937)	137 (3,480)	111 (2,819)	142 (3,607)
B4T3-500	300	5 / 4	10,500 (4,763)	165 (4,191)	147 (3,734)	114 (2,896)	148 (3,759)

FIVE-TINE ORANGE PEEL GRAPPLES

	Series	Volume yd³ / m³	Weight lb (kg)	Width in (mm)	Tip-To-Tip Width (Open Tines) in (mm)	Height (Open Tines) in (mm)	Height (Closed Tines) in (mm)
B5T15-075	150	0.75 / 0.57	3,350 (1,520)	93 (2,362)	85 (2,159)	70 (1,779)	88 (2,235)
B5T15-100	150	1 / 0.76	3,750 (1,701)	103 (2,616)	91 (2,311)	72 (1,829)	91 (2,311)
B5T15-125	150	1.3 / 1	3,850 (1,746)	108 (2,743)	99 (2,515)	72 (1,829)	93 (2,362)
B5T2-100	200	1 / 0.76	5,700 (2,585)	97 (2,464)	80 (2,032)	85 (2,159)	99 (2,515)
B5T2-125	200	1.3 / 1	5,850 (2,654)	112 (2,845)	99 (2,515)	86.5 (2,197)	106 (2,692)
B5T2-150	200	1.5 / 1.15	6,000 (2,722)	115 (2,921)	102 (2,591)	90 (2,286)	108 (2,743)
B5T2-200	200	2.0 / 1.52	6,600 (2,994)	128 (3,251)	112 (2,845)	90 (2,286)	114 (2,896)
B5T2-250	200	2.5 / 1.91	7,000 (3,175)	130 (3,302)	120 (3,048)	90 (2,286)	117 (2,972)
B5T2-300	200	3 / 2.29	7,600 (3,447)	137 (3,480)	123 (3,124)	92 (2,337)	121 (3,073)
B5T2-350	200	3.5 / 3	7,200 (3,266)	145 (3,683)	129 (3,277)	92 (2,337)	122 (3,099)

MAGNET GRAPPLES

	Series	yd³ / m³	Magnet Dia. in (mm)	Weight lb (kg)	Width in (mm)	Tip-To-Tip Width (Open Tines) in (mm)	Height (Open Tines) in (mm)	Height (Closed Tines) in (mm)
BMG16-075-M30	160	0.75 / 0.57	30 (762)	4,500 (2,041)	94 (2,388)	93 (2,362)	61 (1,549)	93 (2,362)
BMG16-075-M36	160	0.75 / 0.57	36 (914)	5,000 (2,268)	94 (2,388)	90 (2,286)	66 (1,676)	93 (2,362)
BMG16-100-M30	160	1 / 0.76	30 (762)	4,600 (2,087)	101 (2,565)	101 (2,565)	66 (1,676)	96 (2,438)
BMG16-100-M36	160	1 / 0.76	36 (914)	5,100 (2,313)	101 (2,565)	98 (2,489)	66 (1,676)	96 (2,438)
BMG16-125-M36	160	1.3 / 1	36 (914)	5,200 (2,359)	110 (2,794)	106 (2,692)	66 (1,676)	100 (2,540)
BMG16-125-M40	160	1.3 / 1	40 (1,016)	6,100 (2,767)	110 (2,794)	106 (2,692)	66 (1,676)	100 (2,540)
BMG2-125-M40C	200	1.3 / 1	40 (1,016)	7,500 (3,402)	102 (2,591)	98 (2,489)	77 (1,956)	107 (2,718)
BMG2-150-M40C	200	1.5 / 1.15	40 (1,016)	8,200 (3,719)	107 (2,718)	96 (2,438)	77 (1,956)	110 (2,794)
BMG2-150-M44C	200	1.5 / 1.15	44 (1,117)	8,300 (3,765)	106 (2,692)	102 (2,591)	77 (1,956)	110 (2,794)
BMG2-150-M50C	200	1.5 / 1.15	50 (1,270)	9,300 (4,218)	107 (2,718)	102 (2,591)	77 (1,956)	110 (2,794)
BMG2-200-M40C	200	2 / 1.5	40 (1,016)	8,000 (3,629)	119 (3,023)	114 (2,896)	77 (1,956)	116 (2,946)
BMG2-200-M44C	200	2 / 1.5	44 (1,118)	8,250 (3,742)	119 (3,023)	114 (2,896)	77 (1,956)	116 (2,946)
BMG2-200-M50C	200	2 / 1.5	50 (1,270)	9,200 (4,173)	119 (3,023)	115 (2,921)	77 (1,956)	116 (2,946)

SHIPS GEAR GRAPPLES

	B5TD-500SC	B5TD-600SC	B5TD-700SC	B6TD-1000FC	B6TD-1300FC
Engine	64HP DEUTZ 4 CYL TURBO	64HP DEUTZ 4 CYL TURBO	64HP DEUTZ 4 CYL TURBO	97HP DEUTZ AIR COOLED	130HP DEUTZ CUMMINS TIER 4
Max. Opening in (mm)	142 (3,607)	151 (3,835)	164 (4,166)	203 (5,156)	209 (5,309)
Width in (mm)	163 (4,140)	178 (4,521)	184 (4,674)	219 (5,563)	234 (5,944)
Height Open in (mm)	129 (3,277)	137 (3,480)	133 (3,378)	146 (3,708)	168 (4,267)
Volume yd³ (m³)	4.5 (3.5)	5 (4.5)	6.3 (5.3)	9 (7.6)	11.8 (9.9)
Max Closing Force lb (kg)	83,940 (38,075)	80,377 (36,458)	73,500 (33,339)	97,645 (44,291)	92,279 (41,857)
Height Closed in (mm)	141 (3,581)	152 (3,861)	154 (3,912)	170 (4,318)	182 (4,623)
Weight lb (kg)	13,000 (5,897)	13,500 (6,123)	14,000 (6,350)	22,700 (10,297)	32,000 (12,515)

WASTE SORTING GRAPPLES

	BSG-05W	BSG-07W	BSG-10W	BSG-15W	BSG-25W	BSG-30W	BSG-40W
Machine Class	5t - 9t	7t - 12t	10t - 16t	15t - 22t	25t - 38t	30t - 50t	40t - 65t
Max Opening in (mm)	62 (1,575)	70 (1,778)	70 (1,778)	75 (1,905)	85 (2,159)	92 (2,337)	112 (2,845)
Width in (mm)	28 (711)	28 (711)	34 (864)	36 (914)	44 (1,118)	49 (1,245)	59 (1,499)
Tine Height in (mm)	18 (457)	20.5 (521)	20.5 (521)	33.5 (851)	34 (864)	25.5 (648)	30 (762)
Volume yd^3 (M^3)	0.4 (0.3)	0.4 (0.3)	0.5 (0.38)	0.5 (0.4)	0.8 (0.6)	1.6 (1.25)	2 (1.5)
Force lbf (kN)	5620 (25)	7868 (35)	10,116 (45)	12, 364 (55)	17, 985 (80)	20,233 (90)	24, 729 (110)
Rotation	MR75	MR75	MR160	MR200	MR300	MR300	MR400
Weight lb (kg)	1,000 (454)	1,350 (612)	1,900 (862)	2,900 (1,315)	3,400 (1,542)	4,125 (1,871)	5,175 (2,347)

DEMOLITION CONTRACTOR GRAPPLES

	BDG30-2/3	BDG40-2/3	BDG70-2/3	BDG100-2/3
Machine Class	25t - 38t	30t - 50t	50t - 60t	60t - 100t
Tip Configuration	2/3	2/3	2/3	2/3
Max Opening in (mm)	75 (1,905)	92 (2,337)	112 (2,845)	139 (3,531)
Width in (mm)	41 (1,041)	44 (1,118)	52 (1,321)	61.5 (1,562)
Weight lb (kg)	2,300 (1,043)	2,800 (1,270)	4,600 (2,087)	8,200 (3,719)

DEMOLITION SORTING GRAPPLES

	BSG-07D	BSG-10D	BSG-13D	BSG-18D	BSG-25D	BSG-30D	BSG-40D	BSG-50D
Machine Class	5t - 9t	7t - 12t	10t - 16t	15t - 22t	20t - 29t	25t - 38t	30t - 50t	40t - 65t
Max Opening in (mm)	60 (1,524)	70 (1,778)	70 (1,778)	80 (2,032)	84 (2,134)	88 (2,235)	92 (2,337)	112 (2,844)
Width in (mm)	24 (610)	28 (711)	34 (864)	22.5 (571.5)	44 (1,117)	54 (1,371)	59 (1,499)	59 (1,499)
Tine Height in (mm)	16 (406)	20.5 (521)	20.5 (521)	38 (965)	23.5 (597)	24 (610)	25.5 (648)	30 (762)
Volume yd^3 (m^3)	0.4 (0.3)	0.3 (0.4)	0.3 (0.5)	0.57 (0.75)	1 (0.76))	0.99 (1.3)	1.26 (1.65)	1.52 (2)
Force lbf (kN)	5,620 (25)	7,900 (35)	10,200 (45)	12,365 (55)	15,300 (68)	18,000 (80)	20,250 (90)	25,000 (110)
Rotation	MR75	MR75	MR160	MR200	MR200	MR300	MR300	MR400
Weight lb (kg)	1,275 (580)	1,700 (770)	2,266 (1,030)	3,115 (1,415)	4,180 (1,900)	4,750 (2,150)	5,950 (2,700)	10,120 (4,600)

DEMOLITION MAGNET GRAPPLES

	DMG100-3/2-4kW	DMG150-4/3-6kW	DMG200-4/3-6kW	DMG300-4/3-8kW	DMG400-4/3-8kW
Machine Class	100	150	200	300	400
Tine Configuration	3/2	4/3	4/3	4/3	4/3
Generator Min. (kW)	4	6	6	8	8
Magnet Size in (mm)	22.5 x 27.5 (572 x 699)	27 x 36 (686 x 914)	27 x 36 (686 x 914)	31 x 50 (787 x 1270)	37 x 53 (940 x 1346)
Weight lb (kg)	1,700 (771)	4,100 (1,860)	4,500 (2,041)	6,500 (2,948)	10,600 (4,808)
Width in (mm)	29 (737)	37 (940)	37 (940)	51 (1,295)	54 (1,372)
Height in (mm)	36 (914)	48 (1,219)	54 (1,372)	55 (1,397)	64 (1,626)
Jaw Opening in (mm)	64 (1,626)	84 (2,134)	88 (2,235)	90 (2,286)	112 (2,845)

WRECKER FORKS

	BN22467	BN22867	BN23064
Machine Class	20t - 40t	40t - 50t	50t - 70t
Length in (mm)	144 (3,658)	144 (3,658)	168 (4,267)
Width in (mm)	47 (1,194)	49 (1,245)	40 (1,016)
Tine Height in (mm)	41 (1,041)	41.5 (1,054)	41.5 (1,054)
Capacity at Load Centre lb (kg)	17,600 (7,983)/Pair	16,500 (7,484)/Pair	15,000 (6,804)/Pair
Load Centre in (mm)	72 (1,829)	72 (1,829)	84 (2,134)
Tine Dimensions in (mm)4	4 x 5 x 144 (102 x 127 x 3658)	3 x 5 x 144 (76 x 127 x 3226)	4 x 5 x 168 (102 x 127 x 4267)
Weight (lb)	3,150 (1,429)	2,750 (1,247)	3,350 (1,519)

PRECISION AUTO DISMANTLERS

Model	Tine Width in (mm)	Weight lb (kg)	Opening Width in (mm)
BPAD150	2.25 (57)	2,600 (1,179)	36.75 (933)
BPAD200	3 (76)	2,900 (1,315)	36.75 (933)

DIESEL GENERATORS

	9kW MagGen	9kW MagGen	15kW MagGen	20kW MagGen	30kW MagGen
Generator Output	9 kW	9 kW	15 kW	20 kW	30 kW
Length in (mm)	41 (1041)	49 (1245)	49 (1245)	56 (1422)	67 (1702)
Width in (mm)	23 (584)	23 (584)	23 (584)	28 (711)	32 (813)
Height in (mm)	32 (813)	35 (889)	35 (889)	42 (1067)	42 (1067)
Controller	100% Duty Cycle Electronic	100% Duty Cycle Electronic	100% Duty Cycle Electronic	100% Duty Cycle Electronic	100% Duty Cycle Electronic
Oper. Cond.	Air Cooled	Liquid Cooled	Liquid Cooled	Liquid Cooled	Liquid Cooled
Max. RPM	3,600	3,000	3,000	3,000	2,500
Weight lb (kg)	650 (295)	790 (358)	800 (363)	950 (431)	1,800 (816)
Fuel Type	Gas	Diesel	Diesel	Diesel	Diesel

HYDRAULIC GENERATORS

	9kW HydGen	15kW HydGen	20kW HydGen	30kW HydGen
Generator Output	9 kW	15 kW	20 kW	30 kW
Width in (mm)	15 (381)	15 (381)	16 (406)	17 (432)
Length in (mm)	30 (762)	31 (787)	36 (914)	37 (940)
Height in (mm)	18 (457)	18 (457)	21 (533)	23 (584)
No. of Poles	4	4	4	4
Magnet Size in (mm)	24 - 40 (610 - 1,016)	40 - 57 (1,016 - 1,448)	57 - 67 (1,016 - 1,702)	60 - 78 (1,524 - 1,981)
Weight lb (kg)	210 (95)	220 (100)	250 (113)	350 (159)

BATEMAN

A GRYB COMPANY

(705) 487-5020
BATEMANMANUFACTURING.COM
@BATEMANMFG