

BATEMAN

A GRYB COMPANY

24
hours


ALL PARTS AVAILABLE
WITHIN 24 HOURS.

WARRANTY
2
YEAR

2 YEAR/3,000
HOURS WARRANTY.

COMBINATION GRAPPLE

BCG-BP MODELS

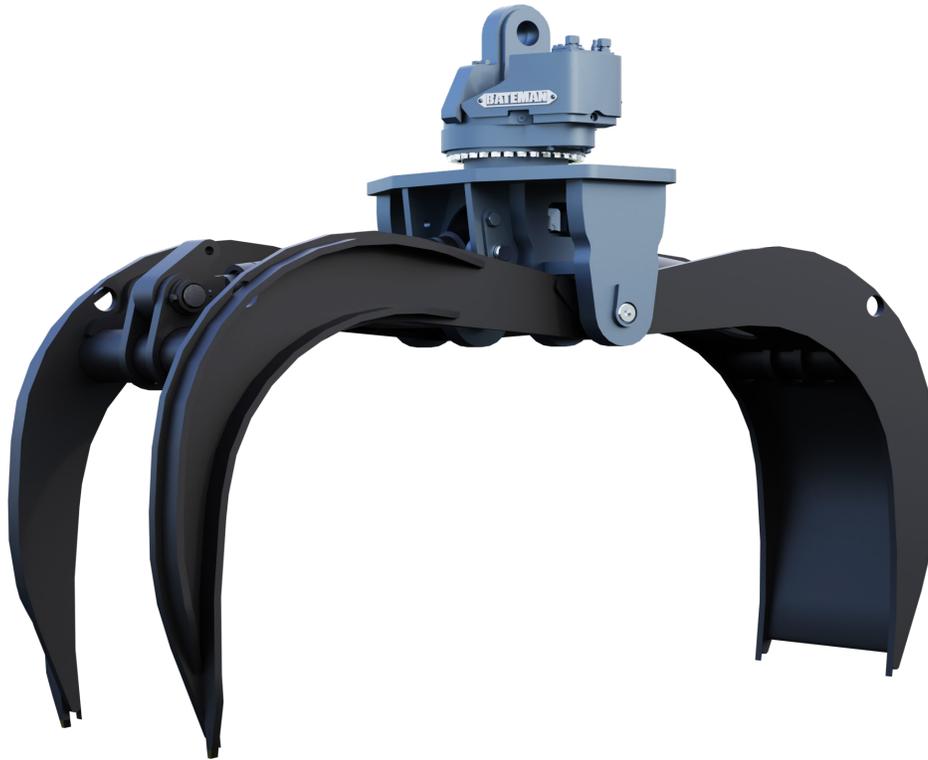

CONTACT US

(705) 487-5020

BATEMANMANUFACTURING.COM

MAIL@BATEMANMANUFACTURING.COM

WORK WITH CONFIDENCE

CUSTOM ATTACHMENT SOLUTIONS AVAILABLE TO MEET YOUR UNIQUE SPECIFICATIONS/APPLICATIONS. WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS AND TO IMPROVE OUR PRODUCTS WITHOUT NOTICE OR OBLIGATION.

COMBINATION GRAPPLE

BCG-BP MODELS

2 YEAR/3,000 HOURS
WARRANTY 

ALL PARTS AVAILABLE
WITHIN 24 HOURS 

The BATEMAN Combination Grapple is designed and ideal for standard forestry applications such as handling small trees and logs.



	BCG-BP-042	BCG-BP-056	BCG-BP-062
Machine Class	3t - 10t	3t - 10t	3t - 10t
Max. Opening in (mm)	42 (1,067)	56 (1,422)	62 (1,575)
Min. Opening in (mm)	6 (152)	7 (178)	6 (152)
Area Tip-To-Tip ft.² (m²)	2.4 (0.09)	3.5 (0.33)	5.25 (0.49)
Volume in Cord 8ft. (m³)	0.15 (0.55)	0.22 (0.79)	0.33 (1.18)
Cylinder Size in (mm)	2.5 (64)	3 (76)	3 (76)
Cylinder Max. Pressure PSI (bar)	3,000 (207)	3,000 (207)	3,000 (207)
Weight lb (kg)	430 (195)	795 (360)	875 (397)

BATEMAN

A GRYB COMPANY


24
hours

ALL PARTS AVAILABLE
WITHIN 24 HOURS.

WARRANTY
2
YEAR

2 YEAR/3,000
HOURS WARRANTY.

COMBINATION HD BYPASS GRAPPLE BCG-BP-HD MODELS

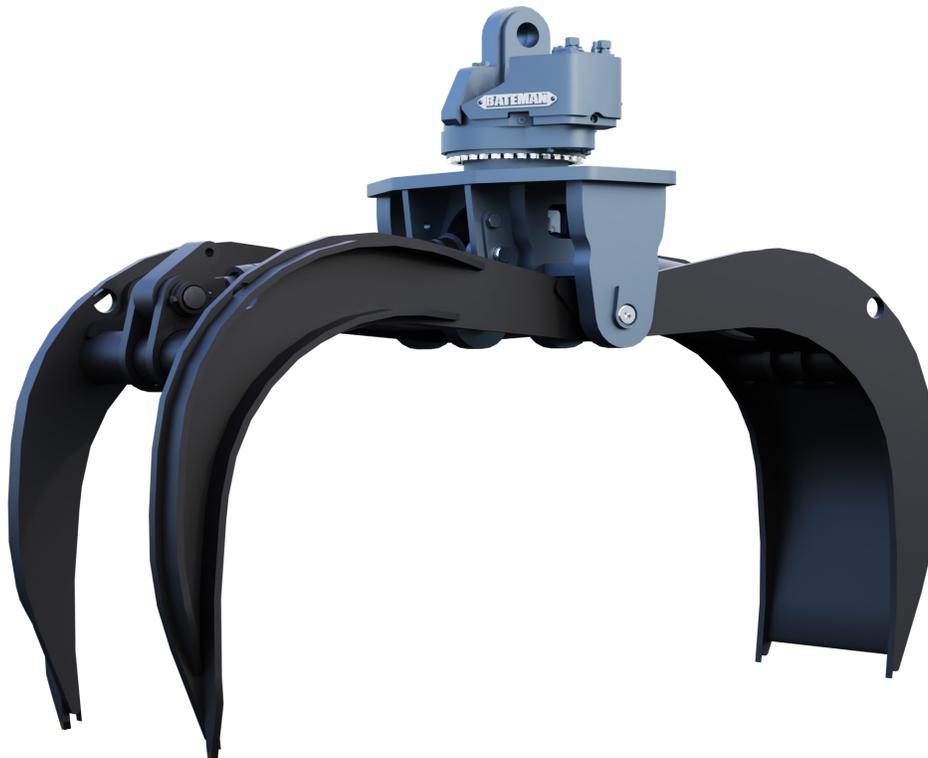

CONTACT US

(705) 487-5020

BATEMANMANUFACTURING.COM

MAIL@BATEMANMANUFACTURING.COM

WORK WITH CONFIDENCE

CUSTOM ATTACHMENT SOLUTIONS AVAILABLE TO MEET YOUR UNIQUE SPECIFICATIONS/APPLICATIONS. WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS AND TO IMPROVE OUR PRODUCTS WITHOUT NOTICE OR OBLIGATION.

COMBINATION HD BYPASS GRAPPLE

BCG-BP-HD MODELS

2 YEAR/3,000 HOURS
WARRANTY 

ALL PARTS AVAILABLE
WITHIN 24 HOURS 

The BATEMAN Combination HD Grapple is designed and ideal for heavy-duty forestry applications such as handling trees and logs.



	BCG-BP-068HD	BCG-BP-076HD	BCG-BP-082HD	BCG-BP-090HD	BCG-BP-102HD	BCG-BP-112HD	BCG-BP-120HD	BCG-BP-128HD	BCG-BP-136HD
Machine Class	5t - 10t	5t - 50t	5t - 50t	5t - 50t	5t - 50t	5t - 150t	18t - 150t	18t - 150t	18t - 150t
Max. Opening in (mm)	68 (1,727)	76 (1,930)	82 (2,083)	90 (2,286)	102 (2,591)	112 (2,845)	120 (3,048)	128 (3,251)	136 (3,454)
Min. Opening in (mm)	6 (152)	6 (152)	6 (152)	7 (178)	9 (229)	10 (254)	11 (279)	12 (305)	12 (305)
Area Tip-To-Tip ft.² (m²)	6.5 (0.6)	7.9 (0.7)	8.7 (0.8)	11 (1)	13.5 (1.25)	16.25 (1.5)	19 (1.8)	21.5 (2)	27 (2.5)
Volume in Cord 8ft. (m³)	0.41 (0.46)	0.49 (1.77)	0.54 (1.93)	0.68 (2.45)	0.84 (3.04)	1.02 (2.80)	1.2 (4.30)	1.35 (4.84)	1.69 (6.1)
Cylinder Size in (mm)	3.5 (89)	3.5 (89)	3.5 (89)	3.5 (89)	3.5 (89)	4.00 (102)	4 (102)	4 (102)	5 (127)
Cylinder Max. Pressure PSI (bar)	3,000 (207)	3,000 (207)	5,000 (345)	5,000 (345)	5,000 (345)	5,000 (345)	5,000 (345)	5,000 (345)	5,000 (345)
Weight lb (kg)	1,210 (549)	1,305 (592)	1,710 (776)	2,175 (987)	2,325 (1,055)	3,375 (1,531)	3,375 (1,531)	4,600 (2,087)	4,800 (2,177)

BATEMAN

A GRYB COMPANY


24
hours

ALL PARTS AVAILABLE
WITHIN 24 HOURS.

WARRANTY
2
YEAR

2 YEAR/3,000
HOURS WARRANTY.

COMBINATION SUPER HD BYPASS GRAPPLE BCG-BP-SHD MODELS

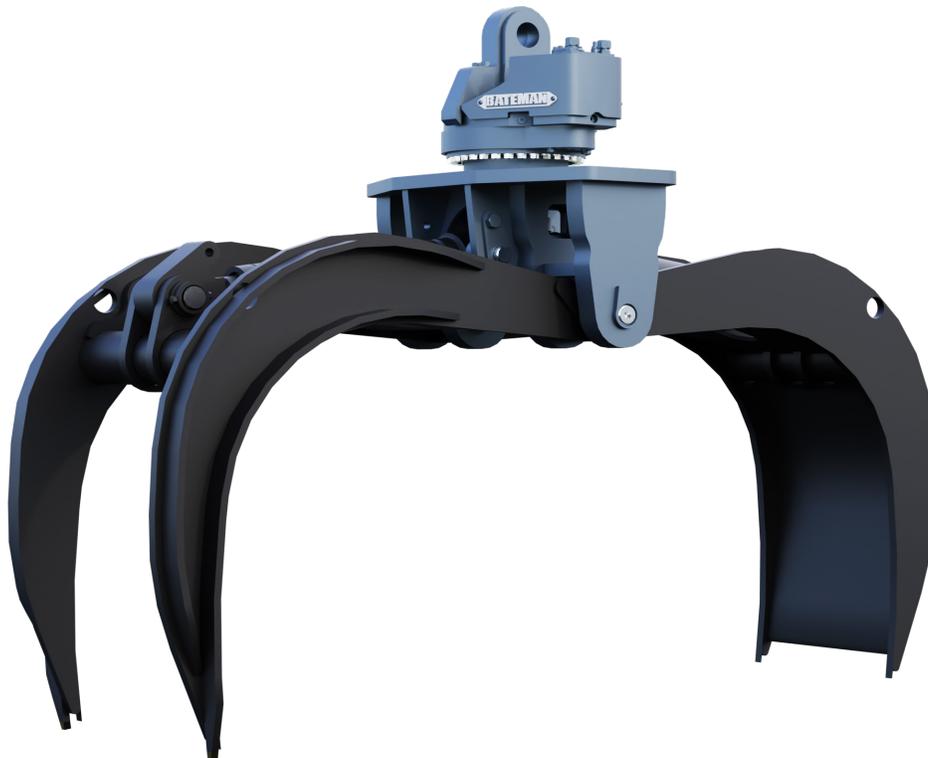

CONTACT US

(705) 487-5020

BATEMANMANUFACTURING.COM

MAIL@BATEMANMANUFACTURING.COM

WORK WITH CONFIDENCE

CUSTOM ATTACHMENT SOLUTIONS AVAILABLE TO MEET YOUR UNIQUE SPECIFICATIONS/APPLICATIONS. WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS AND TO IMPROVE OUR PRODUCTS WITHOUT NOTICE OR OBLIGATION.

COMBINATION SUPER HD BYPASS GRAPPLE

BCG-BP-SHD MODELS

2 YEAR/3,000 HOURS WARRANTY 
 ALL PARTS AVAILABLE WITHIN 24 HOURS 

The BATEMAN Combination Super HD Grapple is designed and ideal for heavy-duty forestry applications such as handling trees and logs.



	BCG-BP-066SHD	BCG-BP-070SHD	BCG-BP-078SHD	BCG-BP-082SHD	BCG-BP-092SHD	BCG-BP-102SHD	BCG-BP-115SHD	BCG-BP-120SHD
Machine Class	5t - 20t	12t - 50t	12t - 50t	18t - 50t	18t - 150t	18t - 150t	40t - 150t	40t - 150t
Max. Opening in (mm)	66 (1,676)	70 (1,778)	78 (1,981)	82 (2,083)	92 (2,337)	102 (2,591)	115 (2,921)	120 (3,048)
Min. Opening in (mm)	6 (152)	6 (152)	6 (152)	7 (178)	8 (203)	9 (229)	10 (254)	11 (279)
Area Tip-To-Tip ft.² (m²)	5.45 (0.5)	6.5 (0.6)	7.85 (0.7)	8.65 (0.8)	11 (1)	13.5 (1.3)	16.25 (1.5)	19 (1.8)
Volume in Cord 8ft. (m³)	0.34 (1.23)	0.41 (0.46)	0.49 (1.77)	0.54 (1.93)	0.68 (2.45)	0.84 (3.04)	1.02 (3.66)	1.2 (4.30)
Cylinder Size in (mm)	3.5 (89)	3.5 (89)	3.5 (89)	3.5 (89)	4 (102)	4 (102)	4 (102)	4 (102)
Cylinder Max. Pressure PSI (bar)	5,000 (345)	5,000 (345)	5,000 (345)	5,000 (345)	5,000 (345)	5,000 (345)	5,000 (345)	5,000 (345)
Weight lb (kg)	1,580 (717)	1,650 (748)	1,680 (762)	2,016 (914)	2,900 (1,315)	3,210 (1,456)	3,325 (1,508)	4,680 (2,123)