



## TECHNICAL SPECIFICATIONS MODEL: B4T16-100SC 160S, 4 TINE, 1 YD<sup>3</sup>, GRAPPLE, BN24127

1	YDз	4	TINE	160	SERIES	GRAPPLE		
Open						91 "	2311.4mm	
Capacity						1.00 yd³	0.75 m³	
Cylinder Bore						3 "	76mm	
Cylinder Max. Pressure						5000 psi	345 bar	
Rotator Max. Pressure						2540 psi	175 bar	
Flow (Rotate Circuit)						10 gpm	38 Lpm	
Grapple Rotation, At 10 gpm						29	29 rpm	
Flow (Open/Close Circuit)						50 gpm	189 Lpm	
Cycle Time Theoritical (Open/Close Circuit)						lit) 1.5 se	1.5 sec/2 sec	
Weight (with rotator)						3340 lb	1515 kg	

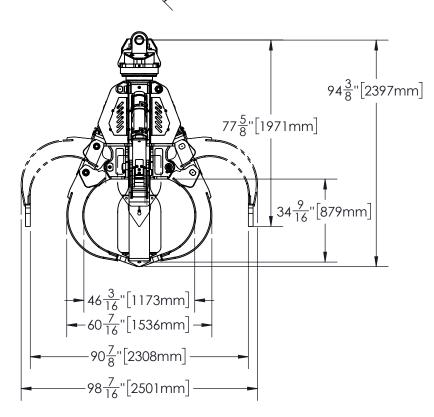

77"[1955mm]

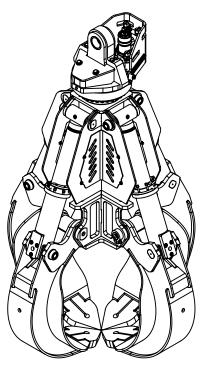

5 Winstar Road Oro-Medonte, ON L0L 2L0, Canada info@batemanmanufacturing.com batemanmanufacturing.com 705-487-5020



2023-10-27

WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS AND TO IMPROVE OUR PRODUCTS WITHOUT NOTICE OR OBLIGATION ALL SCRAP AND MATERIAL HANDLING GRAPPLES DESIGNED IN ACCORDANCE WITH ASME BTH-1 DESIGN AND STRENGTH REQUIREMENTS